



# Modern Hydraulic Technology

division of Newark Special Technology, Inc.

## 250 ton HPM [Stock Number 529]

Model	CU20
Construction	Tie Rod Side Housing
Stroke	30"
Daylight Opening	46" Including 4" Thick Bolster on Bed
Distance Between Uprights	32" L-R
Bolster on Bed	30" x 30", 4" Thick
Hole in Bolster & Bed	6-1/2" Diameter
Slide	30" x 30", Gib Guided
Main Ram	16" x 14" @ 2500 PSI
Prefill Valve	4"
Working Height	30-1/2" Floor to Top of Bed
Press Speeds	I.P.M. 540, 127, 540

Speed & Tonnage Control

Electric Push Button Controls


### Hydraulics:

Mounted on Press Crown. 125 HP 440/3/60, 880 RPM Motor Driving HPM Model 3120, 110 GPM @ 2500 PSI Pump.

Overall Height 16'6" x 4'6" x 4'

Total Weight 40,000 Lbs. Approx.

F.C.A. LOADED Philadelphia, Pa

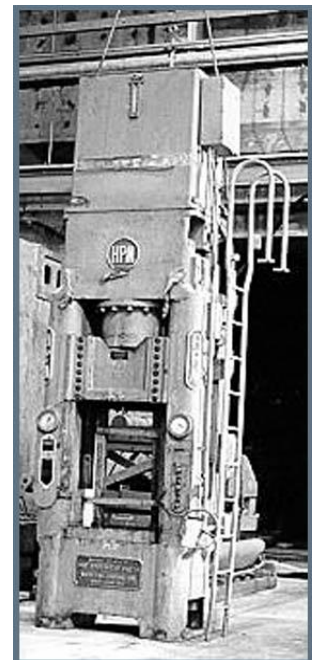

Visit our website at [www.modernhydraulic.com](http://www.modernhydraulic.com)