



MODERN HYDRAULIC TECHNOLOGY

DIVISION OF NEWARK SPECIAL TECHNOLOGY, INC.

1200 ton KENLEE [Stock Number 3820]

Construction	Tie rod, side housing type
Capacity	1200 tons @ 2570 PSI
Stroke	42"
Daylight opening	60"
Slide area	96" L-R x 54" F-B, T slotted
Main rams	(3) 19-1/2" diameter each
Jack rams	(2) 5" diameter each
Return rams	(2) 6" diameter each

Press speeds:
Advance: 700 IPM
Pressing: 53 IPM
Stripping: 270 IPM
Return: 400 IPM

Working Height	49-1/2"
Approximate overall	L-R 128" x F-B 84"


Hydraulic unit #1

Motors: (1) 125 HP motor, 575 volts, 1185 RPM;
(1) 50 HP, 575 volts, 1175 RPM.
Pumps: (1) Vickers PVB45-LSF-20-C; (1) Vickers 3520V 35AB;
(1) Denison (Abex) T6E0521R00A1

Hydraulic unit #2:

Motor: (1) 125 HP, 575 volts, 1185 RPM;
Pumps: (1) Vickers PVB45-LSF-20-C;
(1) Denison (Abex) P46V-020

F.C.A. LOADED trucks, Philadelphia, Pa.

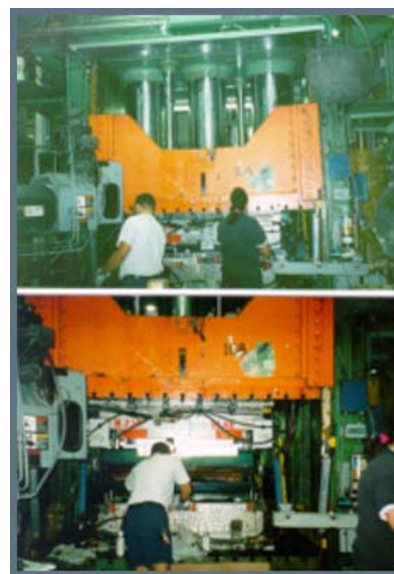

Phone (215) 467 9000 • Fax (215) 467 9220

1900 Kittyhawk Ave., Building 57 Bay – A, Philadelphia, PA 19112, USA

Visit our website at www.hydraulicpresses.com